### **SPEED QUEEN MULTI-HOUSING**

QUANTUM® GOLD COIN DROP INSTALLED, PREP FOR COIN, PREP FOR CARD

## COMMERCIAL FRONT CONTROL FRONT LOAD WASHER

#### **Built for Reliable Performance**


Engineered and built like no other, the Speed Queen front load washer is designed to be everything people thought a washer couldn't be, beginning with its revolutionary suspension and sensing technology. This groundbreaking innovation manages and redistributes out-of-balance loads to deliver uninterrupted cycles, virtually eliminate vibration and operate so quietly neighboring residents won't even know it's running. It also touts an incredible 440 G-Force extraction speed to maximize moisture removal, reduce dry times and minimize utility costs. And as if that's not game-changing enough, this smooth-running, laundry-optimizing machine delivers increased water efficiency. It's everything you never knew it could be.

- · Revolutionary balancing technology
- Industry leading 1200 RPM spin speed exerts 440 G-force extraction
- Integrated meter case
- Extra-wide 15.5" door opening and 180° door swing
- Rugged suspension system
- Easy-to-read digital display
- · Large capacity coin box standard
- Multi-level vend pricing
- Individual cycle modifier keys
- · Durable stainless steel tub standard
- Four-compartment soap dispenser
- Wash Alert<sup>™</sup> with Service Alert capable



Cutting edge Quantum control system from Speed Queen gives you the freedom to manage laundry your way and the power to achieve unmatched levels of revenue. This revolutionary technology provides users with more cycle choices than ever, offers unprecedented options to help lower operating costs and incorporates tools and options to increase revenue.







#### **SPECIFICATIONS**


# COMMERCIAL FRONT CONTROL FRONT LOAD WASHER

MODEL - see below for all models and activation available  CONTROL OPTION  Quantum Gold  COLOR  White  CAPACITY - Ib (kg)  OVERALL WIDTH - in (mm)  OVERALL DEPTH - in (mm)  OVERALL HEIGHT - in (mm)  CYLINDER VOLUME - cu. ft. (liters)  SPIN SPEED G-FORCE (RPM)  MOTOR SIZE - HP (kw)  WATER CONSUMPTION PER CYCLE - g (liter)  WATER CONSUMPTION PER CYCLE - g (liter)  MEF (Modified Energy Factor)  ft²/kWh/cycle (Liters/kWh/cycle)  AVAILABLE WATER TEMPERATURES  AVAILABLE CYCLES  WATER PRESSURE - p.s.i. (bar)  CYLINDER FINISH  NET WEIGHT - Ib (kg)  SHIPPING WEIGHT - Ib (kg)  SHIPPING DIMENSIONS  APPROX in (mm)  AGENCY APPROVALS		
COLOR  CAPACITY - Ib (kg)  CAPACITY - Ib (kg)  OVERALL WIDTH - in (mm)  OVERALL DEPTH - in (mm)  OVERALL DEPTH - in (mm)  OVERALL HEIGHT - in (mm)  CYLINDER VOLUME - cu. ft. (liters)  SPIN SPEED G-FORCE (RPM)  MOTOR SIZE - HP (kw)  O.9 (0.67)  WATER CONSUMPTION PER CYCLE - g (liter)  MF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)  MEF (Modified Energy Factor)  ft³/kWh/cycle (Liters/kWh/cycle)  AVAILABLE WATER TEMPERATURES  Hot, Warm, Cold  Normal, Perm Press, Delicates/Bulky  WATER PRESSURE - p.s.i. (bar)  CYLINDER FINISH  Stainless Steel  NET WEIGHT - Ib (kg)  SHIPPING DIMENSIONS APPROX in (mm)  White  21.5 (9.5)  1.7 (48.3)  21.5 (9.5)  1.7 (44.3)  1.7 (44.3)  1.7 (44.3)  1.7 (44.3)  2.9 (12.5)  Width  34 (864)  Depth 30 (762)  Height 44.5 (1130)		
CAPACITY - Ib (kg)  OVERALL WIDTH - in (mm)  26.875 (683)  OVERALL DEPTH - in (mm)  OVERALL HEIGHT - in (mm)  CYLINDER VOLUME - cu. ft. (liters)  SPIN SPEED G-FORCE (RPM)  MOTOR SIZE - HP (kw)  WATER CONSUMPTION PER CYCLE - g (liter)  WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)  MEF (Modified Energy Factor)  ft³/kWh/cycle (Liters/kWh/cycle)  AVAILABLE WATER TEMPERATURES  Hot, Warm, Cold  Normal, Perm Press, Delicates/Bulky  WATER PRESSURE - p.s.i. (bar)  CYLINDER FINISH  Stainless Steel  NET WEIGHT - Ib (kg)  SHIPPING DIMENSIONS APPROX in (mm)  VARILABLE (130)	CONTROL OPTION	Quantum Gold
OVERALL WIDTH - in (mm) 26.875 (683)  OVERALL DEPTH - in (mm) 27.73 (704)  OVERALL HEIGHT - in (mm) 44.34 (1126)  CYLINDER VOLUME - cu. ft. (liters) 3.42 (96.8)  SPIN SPEED G-FORCE (RPM) 440 (1200)  MOTOR SIZE - HP (kw) 0.9 (0.67)  WATER CONSUMPTION PER CYCLE - g (liter) 11.7 (44.3)  WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle) 3.8 (0.52)  MEF (Modified Energy Factor) 2.98 (84.48)  ft³/kWh/cycle (Liters/kWh/cycle)  AVAILABLE WATER TEMPERATURES Hot, Warm, Cold  Normal, Perm Press, Delicates/Bulky  WATER PRESSURE - p.s.i. (bar) 20-120 (1.4/8.3)  CYLINDER FINISH Stainless Steel  NET WEIGHT - Ib (kg) 260 (118)  SHIPPING DIMENSIONS APPROX in (mm) Depth 30 (762)  Height 44.5 (1130)	COLOR	White
OVERALL DEPTH - in (mm)         27.73 (704)           OVERALL HEIGHT - in (mm)         44.34 (1126)           CYLINDER VOLUME - cu. ft. (liters)         3.42 (96.8)           SPIN SPEED G-FORCE (RPM)         440 (1200)           MOTOR SIZE - HP (kw)         0.9 (0.67)           WATER CONSUMPTION PER CYCLE - g (liter)         11.7 (44.3)           WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)         3.8 (0.52)           MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)         2.98 (84.48)           AVAILABLE WATER TEMPERATURES         Hot, Warm, Cold           AVAILABLE CYCLES         Normal, Perm Press, Delicates/Bulky           WATER PRESSURE - p.s.i. (bar)         20-120 (1.4/8.3)           CYLINDER FINISH         Stainless Steel           NET WEIGHT - Ib (kg)         260 (118)           SHIPPING WEIGHT - Ib (kg)         270 (122.5)           Width 34 (864)         30 (762)           Height         44.5 (1130)	CAPACITY - lb (kg)	21.5 (9.5)
OVERALL HEIGHT - in (mm)         44.34 (1126)           CYLINDER VOLUME - cu. ft. (liters)         3.42 (96.8)           SPIN SPEED G-FORCE (RPM)         440 (1200)           MOTOR SIZE - HP (kw)         0.9 (0.67)           WATER CONSUMPTION PER CYCLE - g (liter)         11.7 (44.3)           WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)         3.8 (0.52)           MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)         2.98 (84.48)           AVAILABLE WATER TEMPERATURES         Hot, Warm, Cold           AVAILABLE CYCLES         Normal, Perm Press, Delicates/Bulky           WATER PRESSURE - p.s.i. (bar)         20-120 (1.4/8.3)           CYLINDER FINISH         Stainless Steel           NET WEIGHT - Ib (kg)         260 (118)           SHIPPING WEIGHT - Ib (kg)         270 (122.5)           Width 34 (864)         30 (762)           APPROX in (mm)         Depth 30 (762)           Height         44.5 (1130)	OVERALL WIDTH - in (mm)	26.875 (683)
CYLINDER VOLUME - cu. ft. (liters)         3.42 (96.8)           SPIN SPEED G-FORCE (RPM)         440 (1200)           MOTOR SIZE - HP (kw)         0.9 (0.67)           WATER CONSUMPTION PER CYCLE - g (liter)         11.7 (44.3)           WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)         3.8 (0.52)           MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)         2.98 (84.48)           AVAILABLE WATER TEMPERATURES         Hot, Warm, Cold           AVAILABLE CYCLES         Normal, Perm Press, Delicates/Bulky           WATER PRESSURE - p.s.i. (bar)         20-120 (1.4/8.3)           CYLINDER FINISH         Stainless Steel           NET WEIGHT - Ib (kg)         260 (118)           SHIPPING WEIGHT - Ib (kg)         270 (122.5)           Width SHIPPING DIMENSIONS APPROX in (mm)         Depth Height         30 (762) 44.5 (1130)	OVERALL DEPTH - in (mm)	27.73 (704)
SPIN SPEED G-FORCE (RPM)         440 (1200)           MOTOR SIZE - HP (kw)         0.9 (0.67)           WATER CONSUMPTION PER CYCLE - g (liter)         11.7 (44.3)           WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)         3.8 (0.52)           MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)         2.98 (84.48)           AVAILABLE WATER TEMPERATURES         Hot, Warm, Cold           AVAILABLE CYCLES         Normal, Perm Press, Delicates/Bulky           WATER PRESSURE - p.s.i. (bar)         20-120 (1.4/8.3)           CYLINDER FINISH         Stainless Steel           NET WEIGHT - Ib (kg)         260 (118)           SHIPPING WEIGHT - Ib (kg)         270 (122.5)           Width 34 (864)         SHIPPING DIMENSIONS APPROX in (mm)         Depth 30 (762)           Height         44.5 (1130)	OVERALL HEIGHT - in (mm)	44.34 (1126)
MOTOR SIZE - HP (kw)         0.9 (0.67)           WATER CONSUMPTION PER CYCLE - g (liter)         11.7 (44.3)           WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)         3.8 (0.52)           MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)         2.98 (84.48)           AVAILABLE WATER TEMPERATURES         Hot, Warm, Cold           AVAILABLE CYCLES         Normal, Perm Press, Delicates/Bulky           WATER PRESSURE - p.s.i. (bar)         20-120 (1.4/8.3)           CYLINDER FINISH         Stainless Steel           NET WEIGHT - Ib (kg)         260 (118)           SHIPPING WEIGHT - Ib (kg)         270 (122.5)           Width 34 (864)         30 (762)           APPROX in (mm)         Depth 30 (762)           Height 44.5 (1130)         44.5 (1130)	CYLINDER VOLUME - cu. ft. (liters)	3.42 (96.8)
WATER CONSUMPTION PER CYCLE - g (liter) 11.7 (44.3)  WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle) 3.8 (0.52)  MEF (Modified Energy Factor) 2.98 (84.48)  tt³/kWh/cycle (Liters/kWh/cycle)  AVAILABLE WATER TEMPERATURES Hot, Warm, Cold  AVAILABLE CYCLES Normal, Perm Press, Delicates/Bulky  WATER PRESSURE - p.s.i. (bar) 20-120 (1.4/8.3)  CYLINDER FINISH Stainless Steel  NET WEIGHT - lb (kg) 260 (118)  SHIPPING WEIGHT - lb (kg) 270 (122.5)  Width 34 (864)  SHIPPING DIMENSIONS APPROX in (mm)  Height 44.5 (1130)	SPIN SPEED G-FORCE (RPM)	440 (1200)
WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle) 3.8 (0.52)  MEF (Modified Energy Factor) 2.98 (84.48) ft³/kWh/cycle (Liters/kWh/cycle)  AVAILABLE WATER TEMPERATURES Hot, Warm, Cold  AVAILABLE CYCLES Normal, Perm Press, Delicates/Bulky  WATER PRESSURE - p.s.i. (bar) 20-120 (1.4/8.3)  CYLINDER FINISH Stainless Steel  NET WEIGHT - Ib (kg) 260 (118)  SHIPPING WEIGHT - Ib (kg) 270 (122.5)  Width 34 (864)  SHIPPING DIMENSIONS APPROX in (mm) Depth 30 (762)  Height 44.5 (1130)	MOTOR SIZE - HP (kw)	0.9 (0.67)
MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)  AVAILABLE WATER TEMPERATURES  AVAILABLE CYCLES  AVAILABLE CYCLES  Delicates/Bulky  WATER PRESSURE - p.s.i. (bar)  CYLINDER FINISH  NET WEIGHT - Ib (kg)  SHIPPING WEIGHT - Ib (kg)  SHIPPING DIMENSIONS APPROX in (mm)  2.98 (84.48)  Hot, Warm, Cold  Normal, Perm Press, Delicates/Bulky  20-120 (1.4/8.3)  20-120 (1.4/8.3)  270 (122.5)  Width 34 (864) Depth 30 (762) Height 44.5 (1130)	WATER CONSUMPTION PER CYCLE - g (liter	11.7 (44.3)
ft³/kWh/cycle (Liters/kWh/cycle)  AVAILABLE WATER TEMPERATURES  AVAILABLE CYCLES  AVAILABLE CYCLES  Berm Press, Delicates/Bulky  WATER PRESSURE - p.s.i. (bar)  CYLINDER FINISH  Stainless Steel  NET WEIGHT - Ib (kg)  SHIPPING WEIGHT - Ib (kg)  SHIPPING DIMENSIONS APPROX in (mm)  AVAILABLE CYCLES  Hot, Warm, Cold  Normal, Perm Press, Delicates/Bulky  20-120 (1.4/8.3)  20-120 (1.4/8.3)  Width  4664)  Depth  30 (762)  Height  44.5 (1130)	WF (WATER FACTOR) - gal/ft³ (liters/liter/cycle	e) 3.8 (0.52)
AVAILABLE CYCLES    Normal, Perm Press, Delicates/Bulky		2.98 (84.48)
AVAILABLE CYCLES  Perm Press, Delicates/Bulky  WATER PRESSURE - p.s.i. (bar)  CYLINDER FINISH  Stainless Steel  NET WEIGHT - Ib (kg)  SHIPPING WEIGHT - Ib (kg)  270 (122.5)  Width  SHIPPING DIMENSIONS APPROX in (mm)  Perm Press, Delicates/Bulky  20-120 (1.4/8.3)  260 (118)  270 (122.5)  Width 34 (864)  Depth 30 (762)  Height 44.5 (1130)	AVAILABLE WATER TEMPERATURES	Hot, Warm, Cold
CYLINDER FINISH         Stainless Steel           NET WEIGHT - Ib (kg)         260 (118)           SHIPPING WEIGHT - Ib (kg)         270 (122.5)           Width 34 (864)         34 (864)           SHIPPING DIMENSIONS APPROX in (mm)         Depth 30 (762)           Height 44.5 (1130)         44.5 (1130)	AVAILABLE CYCLES	Perm Press,
NET WEIGHT - Ib (kg)  SHIPPING WEIGHT - Ib (kg)  Width SHIPPING DIMENSIONS APPROX in (mm)  Pepth A4.5 (1130)	WATER PRESSURE - p.s.i. (bar)	20-120 (1.4/8.3)
SHIPPING WEIGHT - Ib (kg)         270 (122.5)           Width         34 (864)           SHIPPING DIMENSIONS APPROX in (mm)         Depth         30 (762)           Height         44.5 (1130)	CYLINDER FINISH	Stainless Steel
Width   34 (864)	NET WEIGHT - lb (kg)	260 (118)
SHIPPING DIMENSIONS APPROX in (mm)  Depth 30 (762)  Height 44.5 (1130)	SHIPPING WEIGHT - lb (kg)	270 (122.5)
APPROX in (mm)  Depth 30 (/62)  Height 44.5 (1130)		th 34 (864)
	Den	th 30 (762)
AGENCY APPROVALS	Heig	nt 44.5 (1130)
TOLITOT THE THOU THE	AGENCY APPROVALS	cULus

MODELS	DRAIN	ACTIVATION	
SFNNCASG113TW01	Gravity	Coin Drop	
SFNNCAJP113TW01+	Pump	Installed	
SFNNXASP113TW01	Pump	Prep for	
SFNNXASG113TW01	Gravity	Coin	
SFNNYASP113TW01	Pump		
SFNWYASP113TW01*	Pump	Prep for	
SFNNYAJP113TW01+	Pump	Card	
SFNNYASG113TW01	Gravity		



<sup>\*</sup> Wireless Network Board Factory Installed

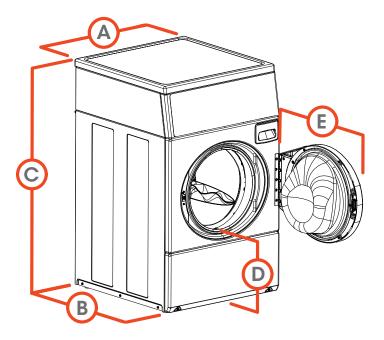

A.	OVERALL WIDTH - in (mm)	26.875 (683)
B.	OVERALL DEPTH - in (mm)	27.73 (704)
C.	OVERALL HEIGHT - in (mm)	44.34 (1126)
D.	FLOOR TO DOOR OPENING -in (mm)	14.6 in. (371)*
E.	DOOR SWING - in (mm)	24 in. (610)

<sup>\*</sup> For ADA compliance turn legs out from base 0.5 inches

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

